


SOLAR SUMMIT XI

Tony Anchante, Engineering Technician
Central Hudson, Electric Distribution Planning

ADAPTIONS DUE TO COVID-19


- ▶ Working Remote
 - ▶ Taken necessary steps to efficiently perform daily duties
 - ▶ DG line (845-486-5215) still available
- ▶ Witness Tests
 - ▶ Wear face masks/coverings at all times
 - ▶ Avoid indoor locations
 - ▶ When possible, perform virtual witness tests

Cumulative PV Systems Installed by Year

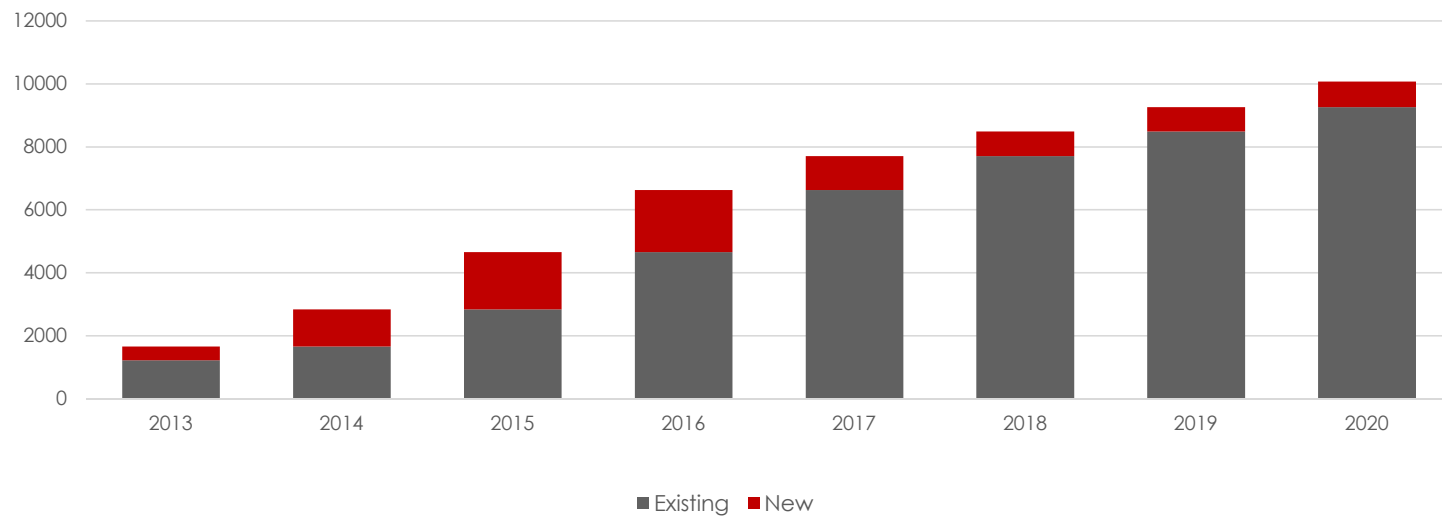


INTERCONNECTED PV

Cumulative PV MW's Installed by Year

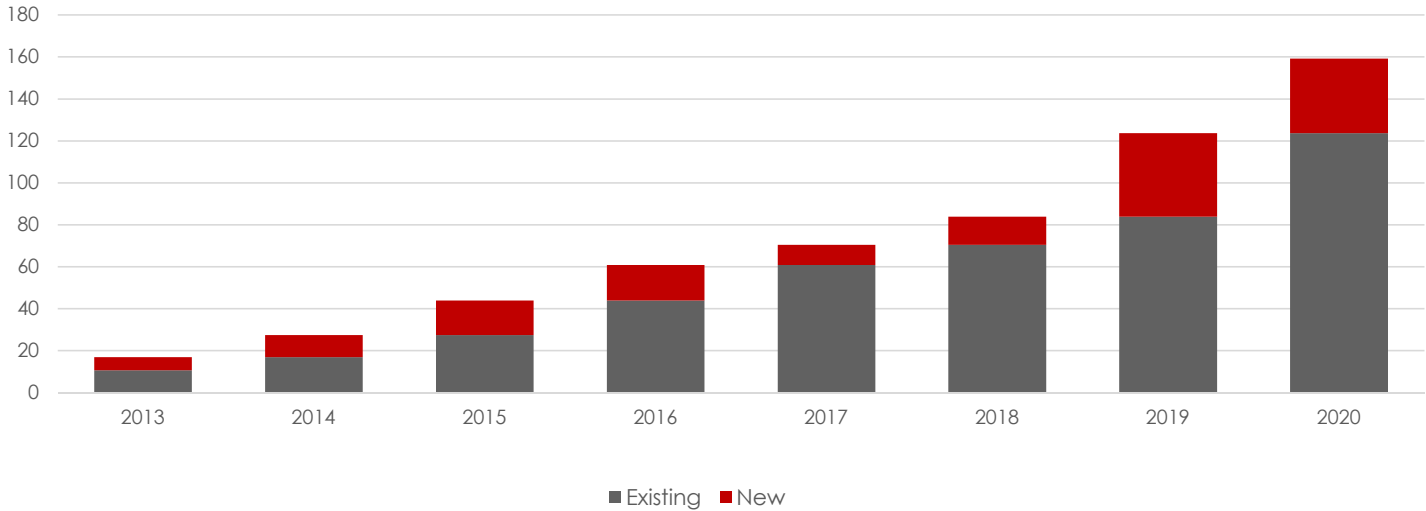

INTERCONNECTED PV MW

SINGLE PHASE TESTING

- ▶ System must shutdown immediately upon loss of utility power
 - ▶ System must not generate power for at least 5 minutes after utility power is restored
 - ▶ Front of the Meter
 - ▶ To be performed on all 3-phase systems
 - ▶ Behind the Meter
 - ▶ To be performed on all 3-phase systems 500kW AC and greater
 - ▶ To be performed on all 3-phase systems that contain a Delta winding transformer between the generating equipment and the utility
- 

PROJECT MODIFICATION REQUESTS

- ▶ Design Changes
 - ▶ Material modification
 - ▶ Withdraw and reapply
 - ▶ Non-Material modification
 - ▶ Move forward with changes
- ▶ Project Reassignment
 - ▶ Reassignment form created through PowerClerk
 - ▶ Certificate of Formation
 - ▶ Certificate of Good Standing
- ▶ Withdrawal Request

QUESTIONS?

